

# Additional Notes for supporting Citrix or TS environment (5.1.1)

## Description

If support for these environments is required, then consider including a unique path for communication. This must be passed in the launch command.

The premise is that the API can be accessed through the unique **apiaddress** presented by the launcher making the listening URL unique for a user session.

## Launch parameters

This is provided with the **apiaddress** launch parameter.

example

[IntegratorLaunch:RUN,INTEGRATOR,user=john@mondago.com;tel=+441733667800;accesscode=PARTNERS-ACCESSCODE;apiaddress={B5127F3C-C456-4160-9248-82E069708D6E}](#)

or


[IntegratorLaunch:RUN,INTEGRATOR,user=<JWT>;accesscode=PARTNERS-ACCESSCODE;apiaddress={B5127F3C-C456-4160-9248-82E069708D6E}](#)

The Host application then uses the BaseAddress +/"**apiaddress**" +/"v1" e.g.

<https://localhost:10443/{B5127F3C-C456-4160-9248-82E069708D6E}/v1/>

Launching with **apiaddress**, you would need to Configure Base URL in order to use the test harness

- Launch client with **apiaddress=12345**
- Launch test harness
- Test harness "Configure Base URL "

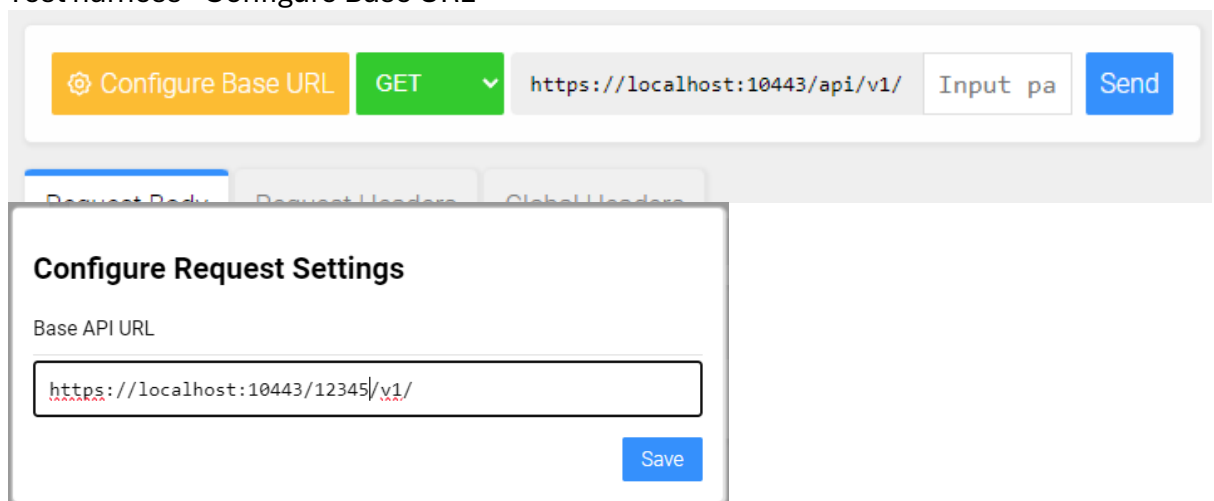

[Partner CRM API Explorer \(windows.net\)](#) - see "Configure Base URL"